

### RASTRAS de DISCOS de TIRO EXENTRICO SEMIPESADAS - Mod. GRSNV 100 - 110 Kgs. Por Disco.


POTENCIA (H.P.)	CANT. DISCOS	ANCHO TRABAJO	EJES	SEPARACION de DISCOS	BANCADAS		ANCHO CHASIS	CILINDROS (Cant.)	CUBIERTAS
					Cantidad	Rodamientos			
45 - 55	12	1,50 mts	42 mm	250 mm	6	32212	0,80 mts	1	6,50 x 16
55 - 65	14	1,75 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
65 - 75	16	2,00 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
75 - 95	18	2,25 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
80 - 110	20	2,50 mts	42 mm	250 mm	8	32212	0,90 mts	1	7,50 x 20
90 - 120	22	2,75 mts	42 mm	250 mm	8	32212	0,90 mts	1	7,50 x 20
100 - 130	24	3,00 mts	42 mm	250 mm	8	32212	1,40 mts	1	7,50 x 20
130 - 150	28	3,50 mts	42 mm	250 mm	8	32212	1,40 mts	1	7,50 x 20
150 - 170	32	4,00 mts	42 mm	250 mm	10	32212	1,40 mts	1	7,50 x 20
110 - 130	24	3,00 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
120 - 140	26	3,25 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
130 - 150	28	3,50 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
140 - 160	30	3,75 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
150 - 170	32	4,00 mts	42 mm	250 mm	10	32212	1,40 mts	1	900 x 20
160 - 180	36	4,50 mts	42 mm	250 mm	12	32212	1,80 mts	1	900 x 20

### RASTRAS de DISCOS de TIRO EXENTRICO SEMIPESADAS - Mod. GRSNPV 250 mm 105 - 120 Kgs. Por Disco.


POTENCIA (H.P.)	CANT. DISCOS	ANCHO TRABAJO	EJES	SEPARACION de DISCOS	BANCADAS		ANCHO CHASIS	CILINDROS (Cant.)	CUBIERTAS
					Cantidad	Rodamientos			
65 - 85	12	1,50 mts	42 mm	250 mm	6	32212	0,80 mts	1	6,50 x 16
75 - 95	14	1,75 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
80 - 110	16	2,00 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
90 - 120	18	2,25 mts	42 mm	250 mm	6	32212	0,90 mts	1	7,50 x 20
100 - 130	20	2,50 mts	42 mm	250 mm	8	32212	0,90 mts	1	7,50 x 20
110 - 130	22	2,75 mts	42 mm	250 mm	8	32212	0,90 mts	1	7,50 x 20
120 - 140	24	3,00 mts	42 mm	250 mm	8	32212	1,40 mts	1	7,50 x 20
150 - 170	28	3,50 mts	42 mm	250 mm	8	32212	1,40 mts	1	7,50 x 20
130 - 150	24	3,00 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
140 - 160	26	3,25 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
150 - 170	28	3,50 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
160 - 180	30	3,75 mts	42 mm	250 mm	8	32212	1,40 mts	1	900 x 20
170 - 190	32	4,00 mts	42 mm	250 mm	10	32212	1,80 mts	1	900 x 20
180 - 200	36	4,50 mts	42 mm	250 mm	12	32212	1,80 mts	1	900 x 20
190 - 220	40	5,00 mts	42 mm	250 mm	12	32212	2,00 mts	1	1000 x 20

### RASTRAS de DISCOS de TIRO EXENTRICO SEMIPESADAS - Mod. GRSNPV 275 mm 107 - 125 Kgs. Por Disco.

POTENCIA (H.P.)	CANT. DISCOS	ANCHO TRABAJO	EJES	SEPARACION de DISCOS	BANCADAS		ANCHO CHASIS	CILINDROS (Cant.)	CUBIERTAS
					Cantidad	Rodamientos			
75 - 95	12	1,650 mts	42 mm	275 mm	6	32212	0,80 mts	1	6,50 x 16
80 - 110	14	1,925 mts	42 mm	275 mm	6	32212	0,90 mts	1	7,50 x 20
90 - 120	16	2,200 mts	42 mm	275 mm	6	32212	0,90 mts	1	7,50 x 20
100 - 130	18	2,475 mts	42 mm	275 mm	6	32212	0,90 mts	1	7,50 x 20
110 - 130	20	2,750 mts	42 mm	275 mm	8	32212	0,90 mts	1	7,50 x 20
130 - 150	22	3,025 mts	42 mm	275 mm	8	32212	1,40 mts	1	7,50 x 20
140 - 160	24	3,300 mts	42 mm	275 mm	8	32212	1,40 mts	1	7,50 x 20
150 - 170	26	3,575 mts	42 mm	275 mm	8	32212	1,40 mts	1	7,50 x 20
130 - 150	28	3,850 mts	42 mm	275 mm	8	32212	1,40 mts	1	7,50 x 20
140 - 160	24	3,300 mts	42 mm	275 mm	8	32212	1,40 mts	1	900 x 20
150 - 170	26	3,575 mts	42 mm	275 mm	8	32212	1,40 mts	1	900 x 20
160 - 180	28	3,850 mts	42 mm	275 mm	8	32212	1,80 mts	1	900 x 20
170 - 190	30	4,125 mts	42 mm	275 mm	8	32212	1,80 mts	1	900 x 20
180 - 200	32	4,400 mts	42 mm	275 mm	10	32212	1,80 mts	1	900 x 20

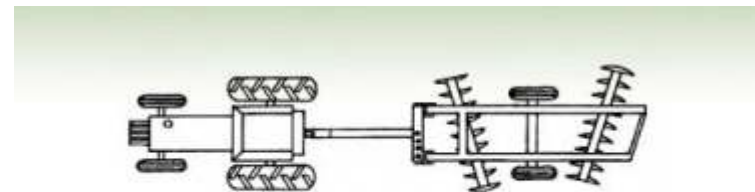

Trabajo NORMAL

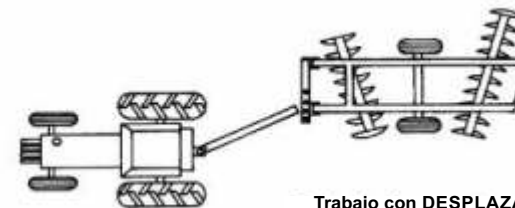

Trabajo con DESPLAZAMIENTO LATERAL



Correderas mixtas que evitan desplazamiento por desajuste.



Limpiadiscos tipo pala, reforzados con soportes individuales.