


RASTRAS de DISCOS de TIRO EXENTRICO LIVIANAS - Modelo GRSLV 75-95 Kgs. Por Disco.


| POTENCIA (H.P.) | CANTIDAD DISCOS | ANCHO TRABAJO | EJE | SEP. | BANCADA | | ANCHO CHASIS | CILINDROS (Cant.) | CUBIERTA MEDIDA |
|--------------------|--------------------|------------------|-------|--------|---------|--------|-----------------|----------------------|--------------------|
| | | | | | Cant. | Rodam. | | | |
| 35 - 55 | 12 | 1,350 mts | 42 mm | 225 mm | 4 | 32211 | 0,70 mts | 1 | 6,50 x 16 |
| 40 - 60 | 14 | 1,575 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 50 - 70 | 16 | 1,800 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 60 - 80 | 18 | 2,025 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 70 - 90 | 20 | 2,250 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 90 - 110 | 22 | 2,475 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 100 - 120 | 24 | 2,700 mts | 42 mm | 225 mm | 6 | 32211 | 0,80 mts | 1 | 6,50 x 16 |
| 105 - 125 | 26 | 2,925 mts | 42 mm | 225 mm | 8 | 32211 | 0,90 mts | 1 | 7,50 x 20 |
| 110 - 130 | 28 | 3,150 mts | 42 mm | 225 mm | 8 | 32211 | 0,90 mts | 1 | 7,50 x 20 |
| 120 - 140 | 32 | 3,600 mts | 42 mm | 225 mm | 8 | 32211 | 1,40 mts | 1 | 7,50 x 20 |
| 130 - 150 | 36 | 4,050 mts | 42 mm | 225 mm | 10 | 32211 | 1,40 mts | 1 | 7,50 x 20 |

RASTRAS de DISCOS de TIRO EXENTRICO NORMALES - Modelo GRSV 85-110 Kgs. Por Disco.

| POTENCIA (H.P.) | CANTIDAD DISCOS | ANCHO TRABAJO | EJES | SEPARACION de DISCOS | BANCADAS | | ANCHO CHASIS | CILINDROS (Cant.) | CUBIERTAS |
|--------------------|--------------------|------------------|-------|-------------------------|----------|-------------|-----------------|----------------------|-----------|
| | | | | | Cantidad | Rodamientos | | | |
| 40 - 60 | 12 | 1,350 mts | 42 mm | 225 mm | 6 | 32212 | 0,70 mts | 1 | 6,50 x 16 |
| 50 - 70 | 14 | 1,575 mts | 42 mm | 225 mm | 6 | 32212 | 0,80 mts | 1 | 6,50 x 16 |
| 60 - 80 | 16 | 1,800 mts | 42 mm | 225 mm | 6 | 32212 | 0,80 mts | 1 | 6,50 x 16 |
| 70 - 90 | 18 | 2,025 mts | 42 mm | 225 mm | 6 | 32212 | 0,90 mts | 1 | 7,50 x 20 |
| 80 - 100 | 20 | 2,250 mts | 42 mm | 225 mm | 8 | 32212 | 0,90 mts | 1 | 7,50 x 20 |
| 90 - 110 | 22 | 2,475 mts | 42 mm | 225 mm | 8 | 32212 | 0,90 mts | 1 | 7,50 x 20 |
| 100 - 120 | 24 | 2,700 mts | 42 mm | 225 mm | 8 | 32212 | 0,90 mts | 1 | 7,50 x 20 |
| 110 - 130 | 26 | 2,925 mts | 42 mm | 225 mm | 8 | 32212 | 0,90 mts | 1 | 7,50 x 20 |
| 120 - 140 | 28 | 3,150 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 7,50 x 20 |
| 125 - 150 | 30 | 3,375 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 7,50 x 20 |
| 130 - 160 | 32 | 3,600 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 7,50 x 20 |
| 120 - 140 | 28 | 3,150 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 900 x 20 |
| 125 - 150 | 30 | 3,375 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 900 x 20 |
| 130 - 160 | 32 | 3,600 mts | 42 mm | 225 mm | 8 | 32212 | 1,40 mts | 1 | 900 x 20 |
| 140 - 170 | 36 | 4,050 mts | 42 mm | 225 mm | 10 | 32212 | 1,80 mts | 1 | 900 x 20 |
| 160 - 200 | 40 | 4,500 mts | 42 mm | 225 mm | 12 | 32212 | 1,80 mts | 1 | 900 x 20 |
| 180 - 220 | 44 | 4,950 mts | 42 mm | 225 mm | 12 | 32212 | 1,80 mts | 1 | 900 x 20 |

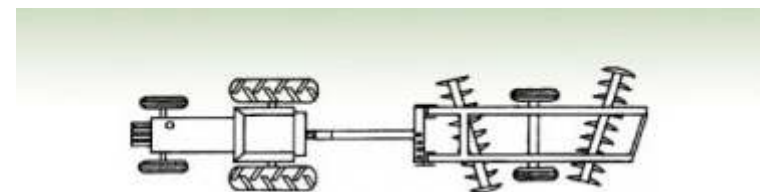

Trabajo NORMAL

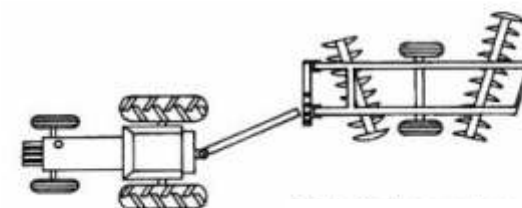

Trabajo con DESPLAZAMIENTO LATERAL



Correderas mixtas que evitan desplazamiento por desajuste.



Limpiadiscos tipo pala, reforzados con soportes individuales.